



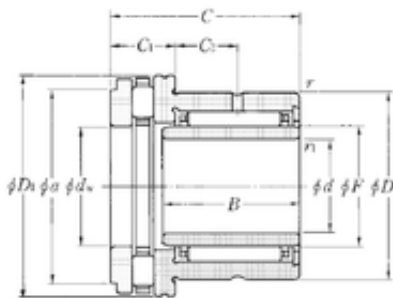

Bearing equipment manufacturing Co., Ltd

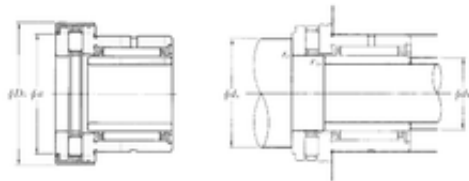

NKXR15T2Z+IR12 × 15 × 16 Bearing 2D drawings and 3D CAD models

12 mm x 24 mm x 16 mm NTN
NKXR15T2Z+IR12 × 15 × 16 complex bearings

Bearing No. NKXR15T2Z+IR12 × 15 × 16

Bore Diameter	12 mm
Outer Diameter	29 mm
d	12 mm
d1	15 mm
F	15 mm
D	24 mm
D1	28 mm
D2	29 mm
B	16 mm
C	23 mm
ra1 max.	0,3 mm
a	23,7 mm
r min.	0,3 mm
r1 min.	0,3 mm
C1	9 mm
da min.	25 mm
db min	14 mm
ra max.	0,3 mm
C2	6,5 mm
Weight	0,06 Kg
Dynamic load rating radial (C)	8,25 kN
Dynamic load rating axial (C)	12,9 kN
Static load rating radial (C0)	10,2 kN
Static load rating axial (C0)	28,6 kN



Bearing equipment manufacturing Co., Ltd

(Grease) Lubrication Speed

2800 r/min